


DF-150E

Custom Configure The Exact O₂ Analyzer You Need

The DF-150E with the E-Sensor provides the maximum flexibility in configuring your O₂ analyzer to meet your application. You select the components and capabilities that your application requires and we build it to match.

Improved Speed of Response (figure 3)

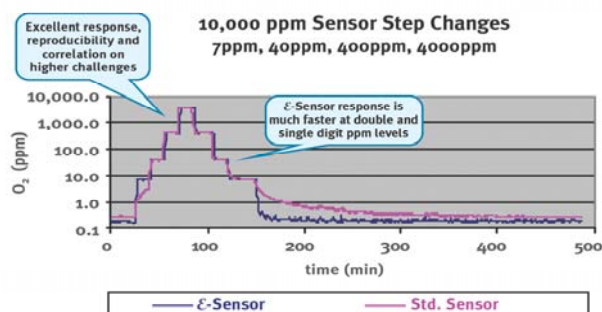

Superior Performance

- The analyzer is delivered calibrated and ready to use

Accuracy

- The greater of +/- 3% Reading or 0.5% of Range Below 2.5 ppm

Fast Response

- Instantaneous response to oxygen change
- Fast response, typically less than 10 seconds to read 90% of a step change

For more information about the DF-150E, the 100E Series or the E-Sensor, visit www.delta-f.com.

DF-150E Specifications

Range

Ranges are available from 0-10 ppm to 0-25%

Sample Gas Compatibility

Standard Sensor – All inert and passive gases including N₂, H₂, CO, freons, hydrocarbons, etc.

Sensor With STAB-EL™ Option – Neutralizes trace contaminants including acids Such as CO₂, H₂S, NO_x, SO_x, etc. (Consult Delta F for concentration limits)

Options

Oxygen Alarms	Classified Area Enclosures
STAB-EL™ Acid Gas System	Flow Alarm
CE Certification	Three Range
Remote Sensor	Sample Pump
Classified Area Enclosures	Analog Outputs

Accuracy

± 2% Full Scale at constant temperature (±5 % below 0-2.5 ppm)

Response Time

Responds simultaneously to O₂ change.

Equilibrium time depends on specific conditions

Typically less than 10 seconds to read 90% of a step change

Sample Requirements

Gas phase, non-condensing, 0 to 150°F

Flow should be 1.0 to 3.0 SCFH at 0.2 to 1.0 psig pressure

Misc.

19.7 cm W x 21.6 cm H x 25.4 cm D 7kg (7.75"Wx8.5"Hx10"D 15 lbs.)

Operate between 0° and 45° C ambient (32° and 120° F)

115 VAC or 220 VAC at 25 Watts

Configuration and Installation

Delta F provides comprehensive assistance for a broad variety of application problems including sample gases with acids, hydrocarbons, particles and other contaminants. Depending on the model, Delta F analyzers can be configured to provide a wide choice of outputs for data collection and process control systems. Most Delta F analyzers can be configured for remote operation and all can be ordered with classified area enclosures. Contact your Delta F rep for an Applications Data Sheet and pricing information.



Delta F Corporation
4 Constitution Way
Woburn, MA 01801-1087
USA

Tel: (781) 935-4600
Fax: (781) 938-0531

e-mail: marketing@delta-f.com
www.delta-f.com